



e 609 silver



www.sennheiser.com/download

- | | |
|---------------------------|--------------------|
| Quick Guide | Kvikstartguide |
| Kurzanleitung | Pikaohje |
| Guide rapide | Γρήγορος οδηγός |
| Guía rápida | Kısa Kılavuz |
| Guía de inicio rápido | Краткая инструкция |
| Guia rápido | 快速指南 |
| Beknopte handleiding | 快速使用指南 |
| Krótká instrukcja obsługi | クイックガイド |
| Snabbguide | 퀵 가이드 |


Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany
Publ. 06/24 581326/A06


SENNHEISER

Setup




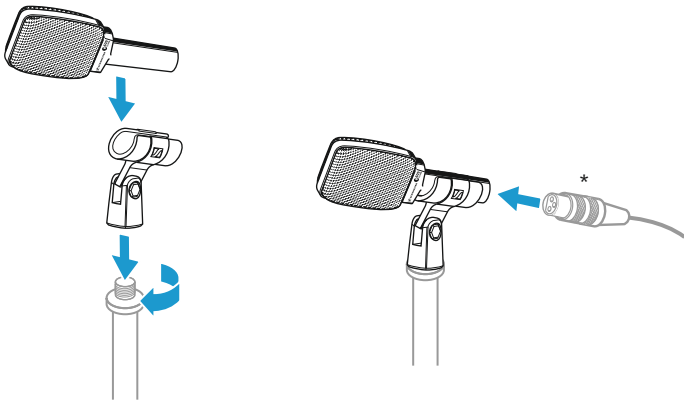



*XLR-3 cable not included

In the box

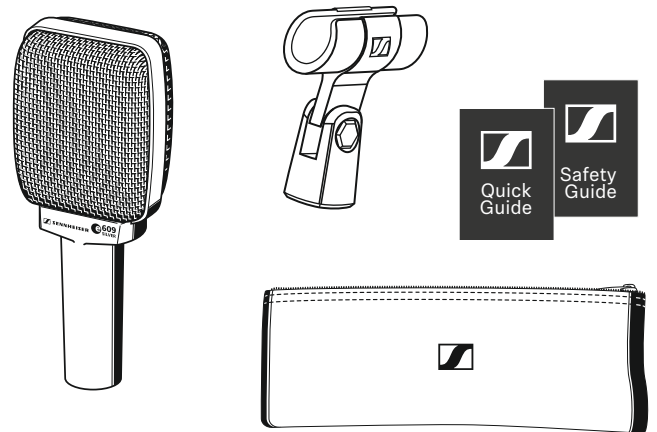

Overview

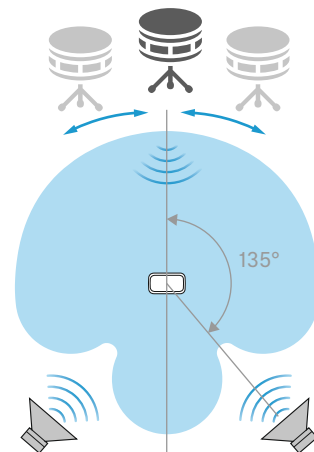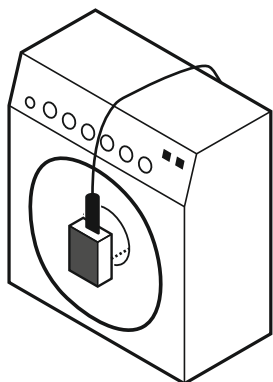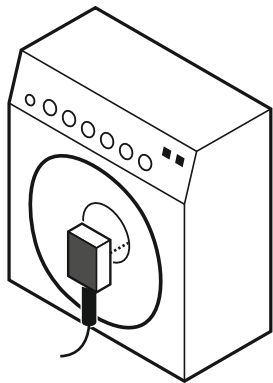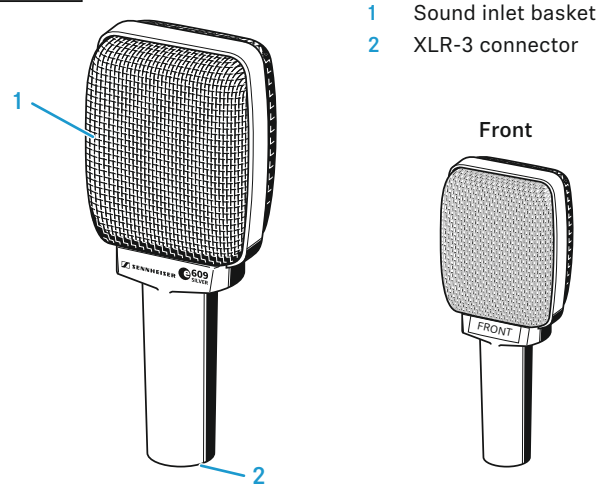

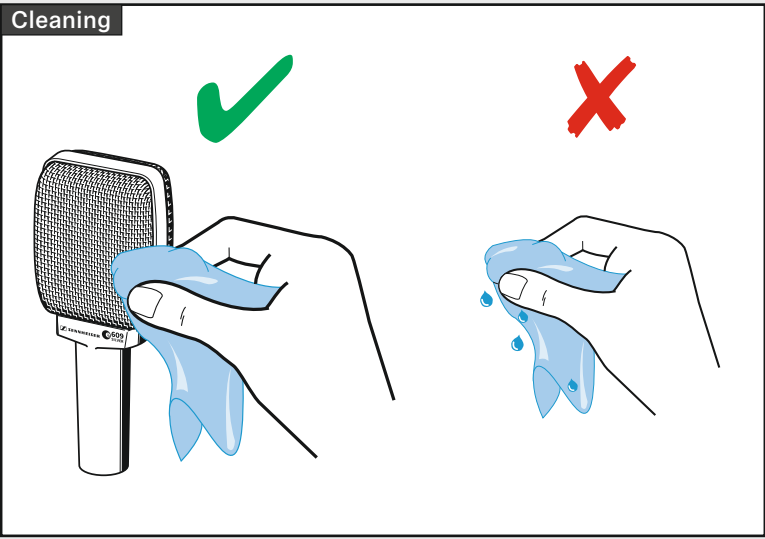

Specifications

Transducer principle	dynamic
Frequency response	40 - 15,000 Hz
Pick-up pattern	super-cardioid
Sensitivity (free field, at 1 kHz)	1.5 mV/Pa
Nominal impedance (at 1 kHz)	350 Ω
Min. terminating impedance	1 kΩ
Connector	XLR-3
Dimensions	55 x 34 x 134 mm
Weight	140 g

