



www.sennheiser.com/download



e 845/e 845 S

Quick Guide
Kurzanleitung
Guide rapide
Guida rapida
Guía de inicio rápido
Guia rápido
Beknopte handleiding
Krótka instrukcja obsługi
Snabbguide

Kvikstartguide
Pikaohje
Γρήγορος οδηγός
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
퀵 가이드


Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany
Publ. 12/24, 581330/A04


SENNHEISER

Setup

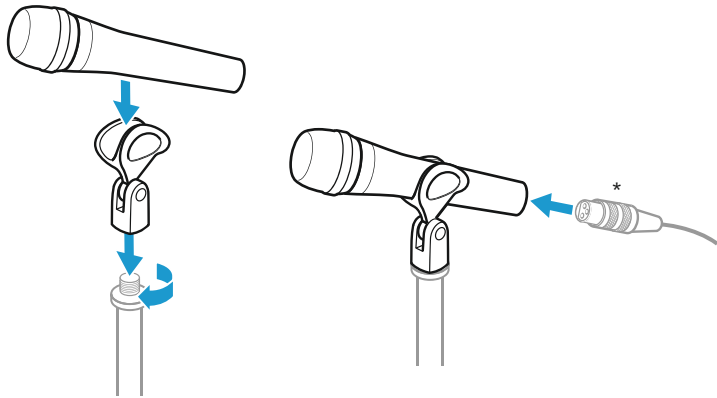

*XLR-3 cable not included

In the box

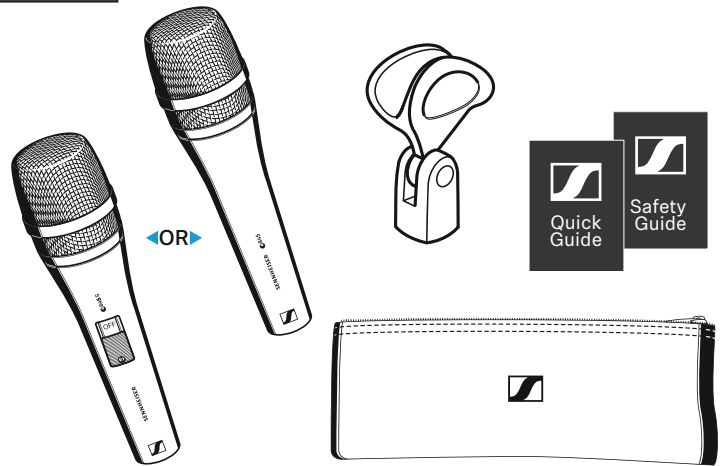



Overview

e 845




- 1 Sound inlet basket
- 2 XLR-3 connector
- 3 On/off switch (e 845 S only)
- 4 Screw (e 845 S only)


e 845 S

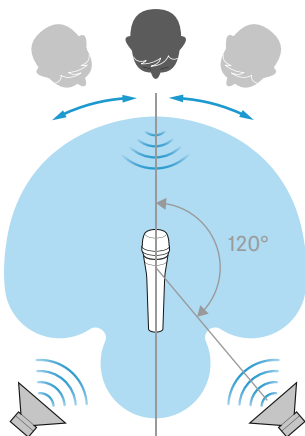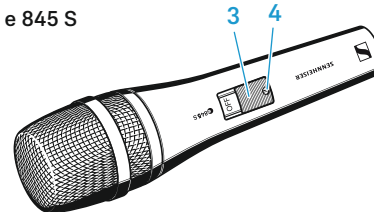

ON/OFF






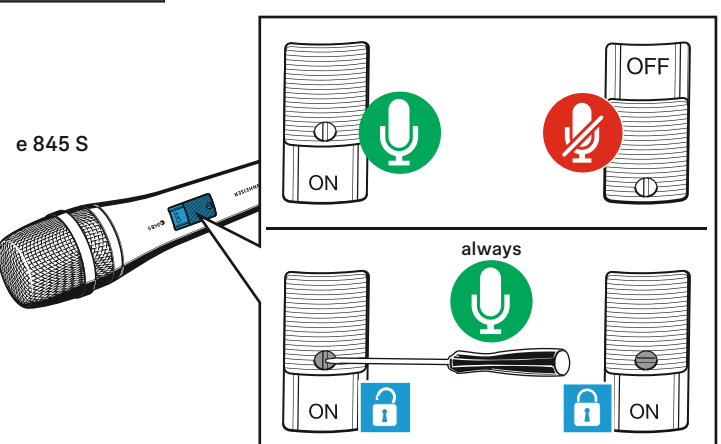


Accessory

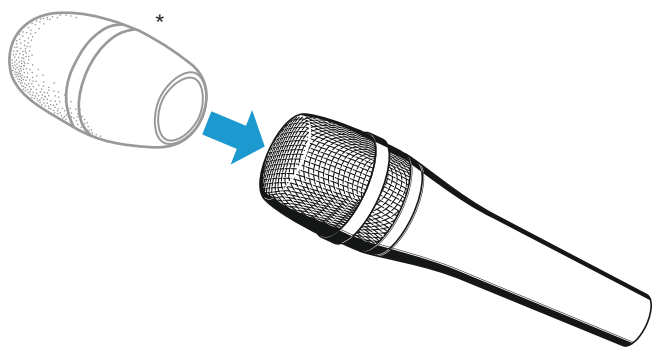

*MZW 4032 not included




Cleaning

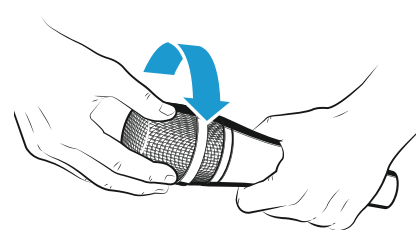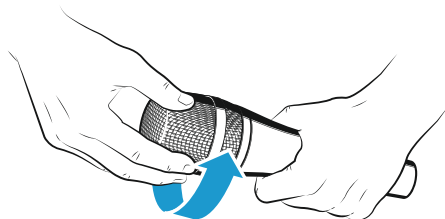


Specifications

Transducer principle	dynamic
Frequency response	40 - 16,000 Hz
Pick-up pattern	super-cardioid
Sensitivity (free field, at 1 kHz)	1.8 mV/Pa
Nominal impedance (at 1 kHz)	350 Ω
Min. terminating impedance	1 k Ω
Connector	XLR-3
Temperature range	0 °C to +40 °C
Dimensions	$\varnothing$ 46 x 185 mm
Weight	330 g

Connector assignment

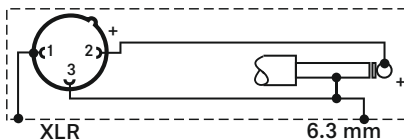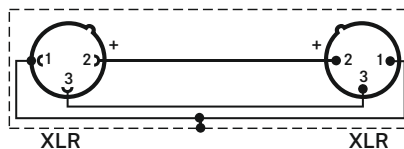

UNBALANCED

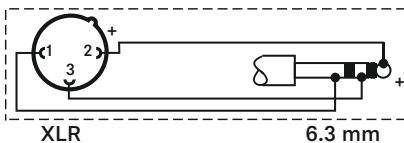

BALANCED

Polar pattern and frequency response

